# Magnex Drill 40


**Features:**

- Very light and compact
- Suits 19mm Weldon shanks
- Double dove-tailed height adjustable for using drill chucks
- Ergonomic design
- Solid Brass Guides

Quick-release chuck is recommended. **Refer to page 98.**



## Specifications

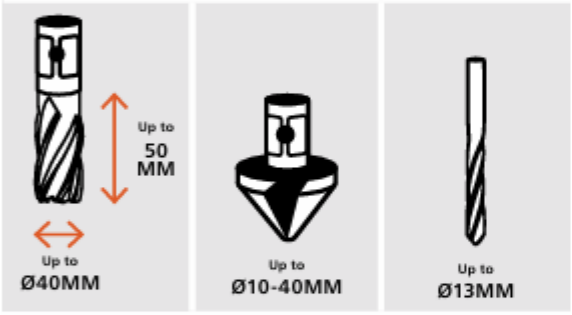


| | |
|---|---|
| Core drill dimensions | Ø 12.0 - 40 MM |
| Cutting depth | 50.0 MM |
| Twist drill | 1.0 - 13.0 MM |
| Counter boring | 10.0 - 40.0 MM |
| Arbors | 19 MM Weldon shank |
| Stroke | 105 MM |
| Height adjustment | 80 MM |
| Gearbox - on-load speed | 450 RPM |
| Power consumption | 1,100 W |
| Voltage | 230 V 50/60 Hz |
| Tool Force (10 MM) / Magnetic adhesion force | 2,800 N/17,000 N |
| Tool force (6 MM S235) | 2,300 N |
| Magnetic base | 72 X 190 MM |
| Weight | 9.9 KG |

| Code | 18801 |
|---|---|
| **Magnet** | |
| Permanent Magnet | ● |
| Tin-Coating | ● |
| **Scope Of Delivery** | |
| Metal core drilling machine Magnex40 | ● |
| Carrying Case | ● |
| Safety Strap | ● |
| Coolant Device | ● |
| Operating Instructions | ● |

2 Year Warranty

Made in Germany




# The New Magnex

**The new, unique Magnex Drill provides improved safety by using a powerful magnet that does not need a power supply to work. It adheres to even the thinnest steel sheets or beams allowing:**

- Safe working environment as it adheres without a power supply
- Increased efficiency by eliminating the need for secondary clamps, straps, chains, or additional counter magnets
- Wider range of steel with a thickness of 1.6MM or more

The Magnex comes in three sizes: Magnex Drill 40, Magnex Drill 50 (two-speed workhorse), and Magnex Drill 100 RLE, making it suitable for any job size. It offers faster, safer, and more reliable performance.

Play Video