Light Duty Castors

- Rubber Wheels

Features double ball bearing headrace with outer bearing seals ensuring smooth swivelling action and long life

- *Grey rubber wheels for shock absorbency and non-marking qualities*
- *Strong and durable with polyprop centres and sealed ball bearings*
- *Smooth and quiet running suited for light duty trolleys, furniture and home use*
- *For loads up to 60kg*



H

LLR50/H



H

ALR65/H



H-TB

ALR100/H-TB

BRACKET KEY

H Swivel H-TB Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake (mm)	Bolt Hole Size
LLR50/H	50	20	Grey Rubber	40kg	Ball	68	S	10
LLR50/H-TB	50	20	Grey Rubber	40kg	Ball	68	TB	10
ALR50/H	50	25	Grey Rubber	50kg	Ball	72	S	10
ALR50/H-TB	50	25	Grey Rubber	50kg	Ball	72	TB	10
ALR65/H	65	25	Grey Rubber	60kg	Ball	93	S	10
ALR65/H-TB	65	25	Grey Rubber	60kg	Ball	93	TB	10
ALR100/H	100	25	Grey Rubber	60kg	Ball	134	S	12
ALR100/H-TB	100	25	Grey Rubber	60kg	Ball	134	TB	12

- Urethane Wheels

Features double ball bearing headrace with outer bearing seals ensuring smooth swivelling action and long life

- *Urethane wheels for hard wearing and non-marking qualities*
- *Strong and durable with polyprop centres*
- *Smooth and quiet running suited for light duty trolleys, furniture and home use*
- *For loads up to 40kg*

REFER TO PAGE 69-71 FOR TUBE FITTING



H

ALU50/H



H-B

ALU50/H-B

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake (mm)	Bolt Hole
ALU50/H	50	20	Urethane	40	Plain	67	S	10
ALU50/H-B	50	20	Urethane	40	Plain	67	B	10

Heavy Duty Twin Wheel Castors

- *Rubber Wheels*
Features double ball bearing headrace with outer seals ensuring smooth swivelling action and long life

- *Twin rubber wheels for shock absorbing and non-marking qualities*
- *Strong and durable with polyprop centres and sealed ball bearings*
- *Smooth and quiet running suited for mobile equipment, medical, shops and general industry*
- *For loads up to 90kg*



F
ATR50/P



P
ATR75/P



P-TB
ATR75/P-TB

BRACKET KEY
F Fixed P Swivel P-TB Swivel Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake Fixed	Plate Size (mm)	Bolt Spacing (mm)
ATR50/P	50	2x20	Rubber	70kg	Ball	72	S	60x60	38x38
ATR50/P-TB	50	2x20	Rubber	70kg	Ball	72	TB	60x60	38x38
ATR75/P	75	2x25	Rubber	90kg	Ball	101	S	77x67	55x48
ATR75/P-TB	75	2x25	Rubber	90kg	Ball	101	TB	77x67	55x48

- Urethane Wheels

Features double ball bearing headrace with outer seals ensuring smooth swivelling action and long life

- *Urethane wheels for hard wearing and non-marking qualities*
- *Strong and durable with polyprop centres and sealed ball bearings*
- *Smooth and quiet running suited for mobile equipment, medical, shops and general industry*
- *For loads up to 180kg*



F

LCU75/F



P

LCU100/P



P-TB

LCU125/P-TB

BRACKET KEY

F Fixed P Swivel P-TB Swivel Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake Fixed	Plate Size (mm)	Bolt Spacing (mm)
LCU75/F	75	32	Urethane	100kg	Ball	111	F	95x67	73x45
LCU75/P	75	32	Urethane	100kg	Ball	111	S	95x67	73x45
LCU75/P-TB	75	32	Urethane	100kg	Ball	111	TB	95x67	73x45
LCU100/F	100	32	Urethane	150kg	Ball	135	F	95x67	73x45
LCU100/P	100	32	Urethane	150kg	Ball	135	S	95x67	73x45
LCU100/P-TB	100	32	Urethane	150kg	Ball	135	TB	95x67	73x45
LCU125/F	125	32	Urethane	180kg	Ball	162	F	95x67	73x45
LCU125/P	125	32	Urethane	180kg	Ball	162	S	95x67	73x45
LCU125/P-TB	125	32	Urethane	180kg	Ball	162	TB	95x67	73x45

- Blue Rubber Wheels

Features double ball bearing headrace with outer seals ensuring smooth swivelling action and long life

- *Rubber wheels for shock absorbing and non-marking qualities*
- *Strong and durable with polyprop centres and bearings*
- *Smooth and quiet running suited for mobile equipment, workshops/warehouses and material handling equipment*
- *For loads up to 200kg*



(F)
HCB80/F



(P)
HCB100/P



(P-TB)
HCB125/P-TB

BRACKET KEY

(F) Fixed (P) Swivel (P-TB) Swivel Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake Fixed	Plate Size	Bolt Hole Size
HCB80/F	80	32	Blue Rubber	100kg	Roller	102	F	105x80	80x60
HCB80/P	80	32	Blue Rubber	100kg	Roller	102	S	105x80	80x60
HCB80/P-TB	80	32	Blue Rubber	100kg	Roller	102	TB	105x80	80x60
HCB100/F	100	35	Blue Rubber	150kg	Roller	125	F	105x80	80x60
HCB100/P	100	35	Blue Rubber	150kg	Roller	125	S	105x80	80x60
HCB100/P-TB	100	35	Blue Rubber	150kg	Roller	125	TB	105x80	80x60
HCB125/F	125	36	Blue Rubber	200kg	Ball	154	F	105x80	80x60
HCB125/P	125	36	Blue Rubber	200kg	Ball	154	S	105x80	80x60
HCB125/P-TB	125	36	Blue Rubber	200kg	Ball	154	TB	105x80	80x60

Heavy Duty Castors

- Urethane Wheels

Features double ball bearing headrace with inner and outer seals ensuring smooth swivelling action and long life

- *Urethane wheels for hard wearing and non-marking qualities*
- *Robust and durable with cast iron centres and sealed ball bearings*
- *Smooth and quiet running suited for mobile equipment, heavy workshop and engineering requirements*
- *For loads up to 550kg*



F

IXU100/F



P

IXU150/P



P-TB

JXU200/P-TB

BRACKET KEY

F Fixed P Swivel P-TB Swivel Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake Fixed	Plate Size (mm)	Bolt Spacing (mm)
IXU100/F	100	50	Red Urethane	270kg	Ball	144	F	114x100	85x75
IXU100/P	100	50	Red Urethane	270kg	Ball	144	S	114x100	85x75
IXU100/P-TB	100	50	Red Urethane	270kg	Ball	144	TB	114x100	85x75
IXU125/F	125	50	Red Urethane	320kg	Ball	165	F	114x100	85x75
IXU125/P	125	50	Red Urethane	320kg	Ball	165	S	114x100	85x75
IXU125/P-TB	125	50	Red Urethane	320kg	Ball	165	TB	114x100	85x75
IXU150/F	150	50	Red Urethane	410kg	Ball	191	F	114x100	85x75
IXU150/P	150	50	Red Urethane	410kg	Ball	191	S	114x100	85x75
IXU150/P-TB	150	50	Red Urethane	410kg	Ball	191	TB	114x100	85x75
JXU200/F	200	50	Red Urethane	550kg	Ball	242	F	135x105	105x80
JXU200/P	200	50	Red Urethane	550kg	Ball	242	S	135x105	105x80
JXU200/P-TB	200	50	Red Urethane	550kg	Ball	242	TB	135x105	105x80

Designer Castors

- Urethane Wheels

Features double ball bearing headrace ensuring smooth swivelling action and long life

- *Attractive Clear Urethane wheels for hard wearing and non-marking qualities*
- *Smooth and quiet running suited for shop displays, office furniture and home use*
- *For loads up to 50kg*



(F)

ALPU75/P



(P)

ALPU75/P-B

BRACKET KEY

(F) Fixed (P) Swivel (P-TB) Swivel Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Plate Braked	Size (mm)	Bolt Spacing (mm)
ALPU75/P	75	23	Urethane	50kg	Plain	92	S	50x50	38x38
ALPU75/P-B	75	23	Urethane	50kg	Plain	92	B	50x50	38x38

- Urethane Wheels

Features double ball bearing headrace ensuring smooth swivelling action and long life

- *Urethane wheels for hard wearing and non-marking qualities*
- *Smooth and quiet running suited for mobile equipment, medical and Rubbermaid trolleys*
- *For loads up to 50kg*



WCU100-C11

CODE	Wheel Diameter (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Pintle Type
WCU100/C11	100	Urethane	50kg	Plain	120	Circlip 11mm

Low Profile Heavy Duty Castors

- Urethane/Nylon Wheels
Features double ball bearing headrace ensuring smooth swivelling action and long life

- *Urethane/Nylon wheels for hard wearing and non-marking qualities*
- *Strong and durable with sealed ball bearings*
- *Smooth and quiet running suited for heavy mobile equipment, workshops/warehouses and material handling equipment*
- *For loads up to 600kg*



(F)
IPU35/P



(P-TB)
IPN75/P



(P-TB)
IPN75/P-TB



(P)
IPN50/F

BRACKET KEY
(F) Fixed (P) Swivel (P-TB) Swivel Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake Fixed	Plate Size (mm)	Bolt Spacing (mm)
IPU35/P	35	25	Urethane	100kg	Ball	58	S	60x60	48x48
IPU35/P-TB	35	25	Urethane	100kg	Ball	58	B	60x60	48x48
IPN50/F	50	38	Cast Nylon	300kg	Ball	79	F	84x84	64x64
IPN50/P	50	38	Cast Nylon	300kg	Ball	79	S	84x84	64x64
IPN50/P-TB	50	38	Cast Nylon	300kg	Ball	79	B	84x84	64x64
IPN75/F	75	50	Cast Nylon	600kg	Ball	105	F	100x100	80x80
IPN75/P	75	50	Cast Nylon	600kg	Ball	105	S	100x100	80x80
IPN75/P-TB	75	50	Cast Nylon	600kg	Ball	105	B	100x100	80x80

Low Profile Heavy Duty Castors

- Urethane/Nylon Wheels
Features double ball bearing headrace ensuring smooth swivelling action and long life

- *Urethane/Nylon wheels for hard wearing and non-marking qualities*
- *Strong and durable with sealed ball bearings*
- *Smooth and quiet running suited for heavy mobile equipment, workshops/warehouses and material handling equipment*
- *For loads up to 600kg*



(H)
IPU35/H



(H)
IPN50/H-M16



(H-TB)
IPN75/H-B-M16

BRACKET KEY
(H) Swivel (H-TB) Total Brake

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Brake Fixed	Bolt Hole
IPU35/H	35	25	Urethane	100kg	Ball	58	S	10
IPU35/H-B	35	25	Urethane	100kg	Ball	58	B	10
IPN50/H-M16	50	38	Cast Nylon	300kg	Ball	79	S	M16 bolt
IPN50/H-B-M16	50	38	Cast Nylon	300kg	Ball	79	B	M16 bolt
IPN75/H-M16	75	50	Cast Nylon	600kg	Ball	105	S	M16 bolt
IPN75/H-B-M16	75	50	Cast Nylon	600kg	Ball	105	B	M16 bolt

Gate Castors

- Rubber/Nylon Wheels
Features double ball bearing headrace ensuring smooth swivelling action and long life Rubber wheels for shock absorbing and non-marking qualities, Nylon wheels for hard wearing

- *The spring loaded design provides shock absorption features specifically for use on uneven surfaces and mounting is integrated into the frame of the castor for easy fixing to any gate system*
- *Suited for residential/commercial gates*
- *For loads up to 55kg*



GC50



GSL50/P



GSL100

CODE	Wheel Diameter (mm)	Wheel Width (mm)	Wheel Material	Load per Castor	Bearing Type	Overall Height (mm)	Swivel Total Braked	Plate Mount Size (mm)	Bolt Spacing (mm)
GC50	50	20	Nylon	40kg	Plain	75	F	40x30	2x 8mm holes
GSL50/F	50	20	Rubber	50kg	Ball	155	F	60x49	45x39
GSL50/P	50	20	Rubber	50kg	Ball	155	S	60x49	45x39
GSL100	100	25	Rubber	55kg	Plain	265	S	100x25	2x 8mm holes

Threaded Tube Inserts

- Long Zinc Threaded Tube Inserts

Strong zinc threaded inserts are designed to be pressed or hammered into light wall tubing

- *This ensures a very secure castor fitting and saves time in assembling*
- *The inserts are designed especially so they can be turned down to fit heavier walled tube*
- *Ideal for adjustable feet and swivel castors*




LTZ25-M12



LTZ40-M10



LTZ51-M16

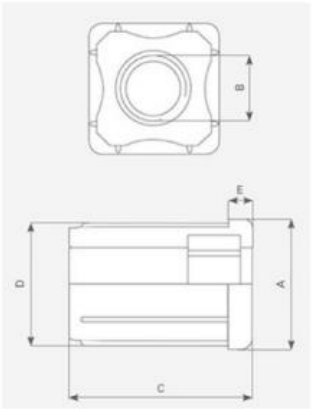

CODE	Tube Size (A)	Thread Size (B)	Overall Length (C)	Shank Width (D)	Rim Thickness (E)	Wall Thickness
LTZ25-M10	25	M10x25	45mm	23mm	7mm	1.6-2mm
LTZ25-M12	25	M12x25	45mm	23mm	7mm	1.6-2mm
LTZ32-M10	32	M10x25	45mm	30mm	7mm	1.6-2mm
LTZ32-M12	32	M12x25	45mm	30mm	7mm	1.6-2mm
LTZ38-M10	38	M10x25	45mm	36mm	7mm	1.6-2mm
LTZ38-M12	38	M12x25	45mm	36mm	7mm	1.6-2mm
LTZ40-M10	40	M10x25	45mm	37mm	8mm	1.6-2mm
LTZ40-M12	40	M12x25	45mm	37mm	8mm	1.6-2mm
LTZ40-M16	40	M16x25	45mm	37mm	8mm	1.6-2mm
LTZ51-M10	50	M10x25	45mm	48mm	10mm	1.6-2mm
LTZ51-M12	50	M12x25	45mm	48mm	10mm	1.6-2mm
LTZ51-M16	50	M16x25	45mm	48mm	10mm	1.6-2mm

Adjustable Levelling Feet

- Adjustable Levelling Feet with zinc threads
A multi adjustable pedestal foot. Special design rubber inserted base to absorb vibration meaning your application will stay exactly where you put it

- *Available in a large range of base diameters and thread sizes*
- *For loads up to 800kg*



JS401060ZP



JS501095ZPF



JS601265ZP



JS10016150ZP-BDF

CODE	Base Diameter (mm)	Thread Size	Thread Length (mm)	Base Height (mm)	Overall Height (mm)	Hex Size	Weight	Cap Type
JS40860ZP	40	M8	60	18	85	9	350	BJ
JS408100ZP	40	M8	100	18	125	13	350	BJ
JS401035ZP	40	M10	35	18	65	13	350	BJ
JS401060ZP	40	M10	60	18	85	13	350	BJ
JS4010100ZP	40	M10	100	18	125	13	350	BJ
JS50850ZPF	50	M8	50	24	80	13	350	FF
JS501050ZPF	50	M10	50	24	80	13	350	FF
JS501095ZPF	50	M10	95	24	120	13	350	FF
JS601265ZP	60	M12	65	25	100	14	650	BJ
JS6012100ZPF	60	M12	100	28	130	14	650	FF
JS8010100ZP-BDF	80	M10	100	18	140	13	350	BDF
JS801265ZP	80	M12	65	24	105	14	650	BJ
JS801265ZP-BDF	80	M12	65	18	95	14	650	BDF
JS8012100ZP	80	M12	100	24	140	14	650	BJ
JS8012100ZP-BDF	80	M12	100	18	135	14	650	BDF
JS801665ZP	80	M16	65	24	105	17	800	BJ
JS8016100ZP	80	M16	100	24	140	17	800	BJ
JS8016150ZP	80	M16	150	24	190	17	800	BJ
JS10012100ZP-BDF	100	M12	100	30	145	17	650	BDF
JS10016150ZP-BDF	100	M16	150	30	200	19	800	BDF

Type* - BJ = Ball Jointed | FF = Fixed Foot | BDF = Ball Jointed Bolt Down