



COMMERCIAL VEHICLE

Workshop Equipment & Fitout Specials

1st May - 31st August 2025

INTRODUCING THE ALEMLUBE AUTOMOTIVE PREMIUM COMMERCIAL VEHICLE OIL CHANGE SYSTEM



Manufactured in the USA by ESOC, the **ESOC875E** electronic commercial vehicle oil change solution is a revolutionary way to dramatically reduce labour time



- Fully pneumatic environmentally safe oil change
- Uses an integrated pistol grip oil dispenser
- Reduces labour time and costs - more time for trucks on the road
- Automatically changes up to 40L of oil in around 15min
- Eliminates operator contact with oil
- Allows technicians to perform other tasks
- Spill-free fittings means zero mess
- Air supply 125psi at 6SCFM
- Fresh oil supply: Minimum 500psi
- Dimensions: 1,200mm (H) x 550mm (W) x 600mm (D)
- Weight: 150kgs
- Quick Connect Spill-Free Fittings sold separately



ESOC RETROFIT KITS & FITTINGS TO SUIT ESOC OIL EXCHANGER*

Product Number	Description
30-M1415K-V	Cummins inlet kit
SM2720K	Cummins drain kit
OE8117	Hose reel female coupling
SC212	Waste Oil Coupling
FL1816KL	Inlet kit suits various makes
30-509K	Cummins/CAT inlet kit
S-51812K	CAT Drain kit
30FSKTX308T408B	Cummins inlet kit
30-509KLM2215	PACCAR inlet kit
S-51618K	Cummins Drain kit
SM2415K	Mack Drain kit



OE8117




30-509K

*Expanded range available, please consult your Alemlube representative for correct applications

GREAT COMBO DEAL
PAGE **4**

ROLLER BRAKE TESTER

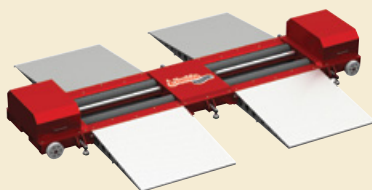

AACRBT15TM
AA 15t Mobile Commercial Roller Brake Tester P3

WHEEL ALIGNERS



AAPWAT6CCD
AA Premium Commercial Wheel Aligner P8

COLUMN LIFTS



AAPMC85T
AA Premium Mobile Column Lifts P12

SUPER SAVINGS ALEMLUBE MEGA EQUIPMENT CATALOGUE



*Applies to the vast majority of Alemlube products. All prices exclude GST and vehicle hoist installation costs.

Visit: alemlube.com.au

RAV825.101
Ravaglioli
25.0t Commercial Vehicle Knuckle Lift



- 25t lifting capacity
- Long platform length of 10m
- Total length of 12.7m
- No cross rails or torsion bars between lifting platforms
- Ribbed anti-slip steel plate platform surface
- Electronic platform synchronisation, independent of load distribution
- Control valves check lowering speed
- Safety valves activate when overload detected
- For inground application
- Manufactured in Italy



KP442NE
Ravaglioli 14.0t Electro-Mechanical
4-Post Commercial Vehicle Hoist



- Maximum access to the vehicle is provided due to the unique feature of extended platforms
- A safety micro-switch is activated after main nut failure & the electro-mechanical safety system ensures perfect horizontal lifting of the platforms & a balanced load on the motors
- Ideal for transport companies, fleet owners, government authorities, mine site & contractor workshops
- Manufactured in Italy



RAV232NL-AF
Ravaglioli
Set of 4 x 5.5t Mobile Column Lift



- Set of four 5,500kg columns
- Comes with adjustable forks
- Master column with a main control panel & slave column with a secondary control panel & emergency stop button
- Large & solid base for maximum stability under load
- Manufactured in Italy



RAV307H.4WS-AF
Ravaglioli
Set of 4 x 7.5t Wireless Mobile Column Lift



- Each column has a lifting capacity of 7.5t
- Sets of 4, 6 & 8 columns can be configured
- Wireless 2.4 GHZ communication among columns
- Handles tyre diameters from 900mm to 1,200mm with a minimum run diameter of 580mm
- Each column powered by two 12V maintenance free 100A/h gel type batteries
- Manufactured in Italy




RAV4651L
Ravaglioli
6.5t 4-Post Commercial Vehicle Hoist with Flat Platforms



- 6,500kg lifting capacity
- Main hydraulic cylinder is located inside the fixed platform providing it with maximum protection
- High resistance, galvanised & pre-stretched metal cables
- Large diameter pulleys with self-lubricating & maintenance free bushes
- Manufactured in Italy

Also Available **RAV4652L** 6.5t 4-Post Wheel Alignment Hoist as above but extra-long 5.7m platforms

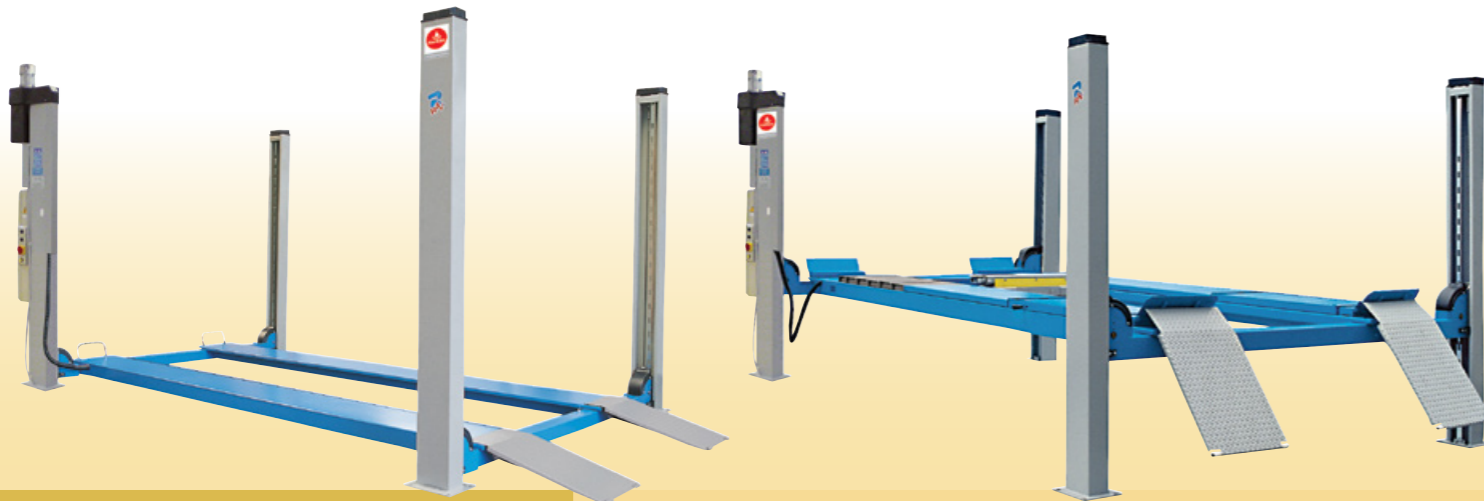

RAV4800-R
Ravaglioli
8.0t Electro-Hydraulic
4-Post Commercial Vehicle Hoist



- High resistance, galvanised & pre-stretched metal cables
- Large diameter pulleys with self-lubricating & maintenance-free bushes
- Adjustable platform to accommodate different vehicle tracks & optimised access to vehicle underside
- Manufactured in Italy

Also Available **RAV4802-R** 8.0t 4-Post Wheel Alignment Hoist

S260A1
Ravaglioli Axle Stand



- Capacity of 7,500kg
- Maximum height 2,030mm
- Minimum height of 1,330mm
- Manufactured in Italy



S800A12
Floor installation Kit for above ground applications

- Ramp Length 2,950mm
- To suit RAV825.101
- Manufactured in Italy



AATB15T
Alemlube Automotive 15.0t Trailer Bridge



- Trailer bridge for lifting truck trailers on mobile column lifts
- Provides the extra height required for working under trailers



GTL2.120RC Ravaglioli Commercial Vehicle Wheel Balancer

2 YEAR WARRANTY

- Quick balancing, with wheel lift to reduce back injuries
- An electro-pneumatic brake holds the wheel in position
- Automatic rotation to the internal unbalance position
- Cones suitable for light trucks up to 281mm
- Complete with cones for trucks (Ø from 202mm - 221mm & 281mm)
- Manufactured in Italy

GRS926 Ravaglioli Commercial Vehicle Tyre Changer

2 YEAR WARRANTY

- Commercial Vehicle Tyre Changer for both roadside & workshop service, suitable for closed vans and/or small workshops.
- Hydraulic chucking table
- Hydraulic up-down movement
- Handles rim size from 11" to 27"
- Manufactured in Italy



RAVCOMBODEAL:
GTL2.120RC
/ GRS926

AA850 Alemlube Automotive Commercial Vehicle Wheel Balancer

1 YEAR WARRANTY

- Suitable for balancing commercial vehicle, bus & light commercial vehicle wheels
- Handles rim sizes from 10" to 24"
- Handles rim widths from 1.5" to 20"
- Balancing accuracy of ±50g
- Manually operated distance & wheel diameter input
- Pneumatic tyre lifting platform
- LED numeric display screen

AA290-240V Alemlube Automotive Commercial Vehicle Tyre Changer

1 YEAR WARRANTY

- Automatic electro-hydraulic operation
- Clockwise & anti-clockwise clamp rotation
- Simultaneous movement of lifting arm & tool carrier
- Handles rim sizes from 14" to 26"
- 1.5kW pump motor & 2.2kW rotating motor
- Maximum tyre diameter of 1,200mm
- Maximum tyre width of 700mm
- Maximum tyre weight of 500kg
- Available in 240V or 415V



AACOMBODEAL:
AA850 / AA290-240V

COMMERCIAL ROLLER BRAKE TESTER OPTIONS

Optional on all Alemlube Roller Brake Testers are the **AAPDT-800M** 15t Hydraulic Play Detector or "shaker" as they are often referred to & the **AARSS-900M** - 15T Side slip tester which tests if a wheel alignment is needed.

The **AAPDT-800M** 15t Hydraulic Play Detector checks for steering & suspension component wear and includes the following features:

- High strength hydraulic pump for accurate component wear diagnosis.
- Automatic (shaker) & manual plate override controls.
- 8 direction movement
- Hand held remote control with powerful torch.
- Available as an inground or mobile option.



The Alemlube **AARSS-900M** - 15T Side slip tester include the following features:


- Tests for tyre wear & determines if a wheel alignment is required.
- Quick & easy test results in only 5 seconds
- Saves time & money as no wasted wheel alignment testing.
- Drive through diagnosis of steer & drive axle deviation (toe-in/toe-out).
- Test result displayed digitally & visually on the LCD screen.

Both of these options can detect extra chargeable work & save money as avoid costly repairs.

AACRB15TM Alemlube Automotive 15t Mobile Commercial Roller Brake Tester

1 YEAR WARRANTY


- Complies to the Australian NHRV Standards
- Automatic weight measurements per axle
- Supplied with cabinet, computer, monitor & printer
- All tests saved to database
- All results can be printed in a detailed printout including weigh-bridge ticket for a total vehicle weight
- Axle Load - 15 Tonne
- Drive Power - 11 KW x 2
- Roller diameter - 150mm
- Roller Length 1,200mm
- Dimensions 4,450mm x 1,440mm x 160mm
- Ramp Length 1,200mm (Optional 1,800mm)

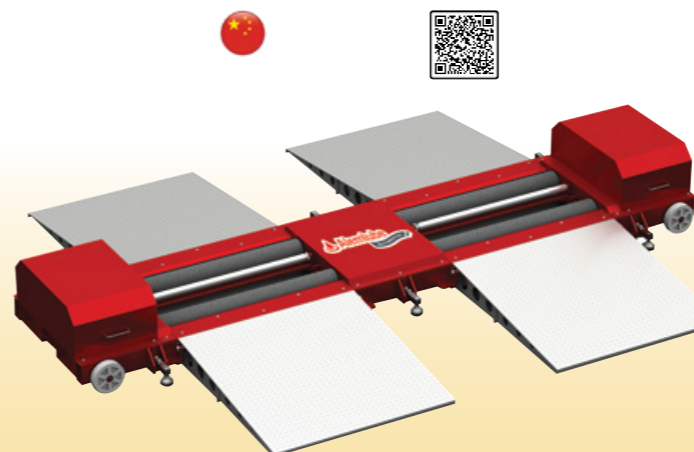

AAPDT-800M Alemlube Automotive 15t Hydraulic Play Detector


1 YEAR WARRANTY

- Checks for steering & suspension component wear
- High strength hydraulic pump for accurate component wear diagnosis.
- Automatic (shaker) & manual plate override controls.
- 8 direction movement
- Handheld remote control with powerful torch.
- Available as an inground or mobile option

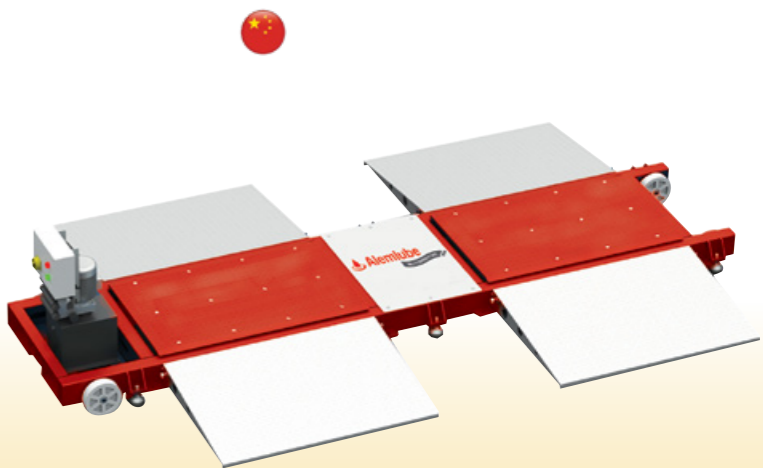

STDA29L Commercial Vehicle Turntables

- Set of 2 commercial turntables
- Capacity 2 x 4500kg Ø 370mm (14.56")

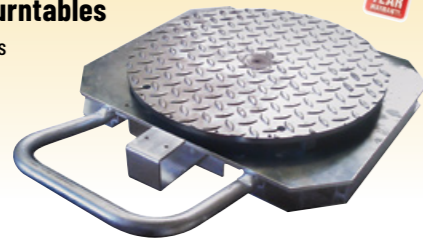

2 YEAR WARRANTY

STDA49N Adapter for Commercial Vehicle Trailer Alignment

- Adapter for trailer alignment



2 YEAR WARRANTY

STDA92 No Run-out Clamps

- Set of 2 non-runout quick adapters
- By referencing the wheel centre it can deliver a more accurate measurement without need to raise each wheel position to perform runout compensation
- Improves productivity by saving 15-20 minutes per truck



2 YEAR WARRANTY

AAPWAT6CCD Alemlube Automotive Premium 6CCD Commercial Vehicle Wheel Aligner

- Bluetooth transmission between front heads and cabinet
- Infra-red transmission between all sensors
- Double inclinometer for caster adjustment
- Latest technology in commercial vehicle alignment with state of the art components
- Specific commercial vehicle alignment software developed for alignment specialists
- Manufactured in Italy



18 MONTH WARRANTY

RAVTD8060/VARCOMBO Ravaglioli Combined Commercial Vehicle & Car Wheel Aligner - First of its Kind

- Comes complete with cabinet, computer, printer, monitor, keyboard, & car and commercial vehicle database.
- Includes two pairs of STDA30E standard commercial vehicle wheel clamps, two pairs of STDA95E 3 point car wheel clamps, one pair of STDA29L commercial turntables, one pair of S110A7 car turntables, 2 front measuring heads for commercial vehicles, 2 front measuring heads for cars, 2 rear measuring heads for cars & commercial vehicles & a modified cabinet to accept 6 measuring heads.
- Manufactured in Italy



2 YEAR WARRANTY

RAVTD8060TWSR Ravaglioli Commercial Vehicle Wheel Aligner

- Bluetooth transmission between front heads & cabinet
- Infrared transmission between sensor heads
- Ability to operate the system from any head
- Data management & display program in Windows environment
- Data bank with vehicle data sheets already entered
- Customer data bank for recording jobs with search by customer name or vehicle plate number
- Manufactured in Italy



2 YEAR WARRANTY

AA48030 Alemlube Automotive 120kg Battery Operated Wheel Lift

- Maximum lifting weight 120kg
- Lifting height 0 to 1,055mm
- Lifting time 15-25 seconds
- Lifting precision of 2mm
- Lift per charge 150 to 200
- 2 x 12V 12AH batteries
- Wheel bracket angle adjustment
- Control panel with Emergency Stop
- Safety tyre hook
- Dimensions: 700mm (W) x 810mm (D) x 1,735mm (H)

Also Available
AA48020
Alemlube Automotive
24V Battery Operated Wheel Lift



NEW

1 YEAR WARRANTY

ESOC-CEX14R3 Alemlube Automotive Premium Commercial Vehicle Coolant Exchanger

- Manufactured in the USA by ESOC, the **ESOC-CEX14R3** Coolant Extraction & Refilling System allows for the extraction, storing and re-filling of engine coolant, eliminating air pockets, during engine maintenance.
- Used to drain, filter & store coolant during a preventative maintenance process or repair.
- In addition, the **ESOC-CEX14R3** can also be used to pressure test & vacuum test the cooling system.
- Coolant is filtered before being re-introduced into the coolant system.
- Optional adapters are available for various engines for both drain & fill
- The **ESOC-CEX14R3** can also be used for a coolant system flush.
- A coolant sample can be taken during the drain process.
- Manufactured in the USA



NEW

10 YEAR WARRANTY Materials & Workmanship

2 YEAR WARRANTY Wearing Components

11028 Alemlube Battery Operated 20L Oil Drum Pump

- Rugged, robust & dependable
 - Transfers up to 280L per battery charge*
 - Flow rates of up to 4.3L/min*
 - Battery run time of up to 65 minutes*
 - Battery recharge time of 45 minutes
 - Interchangeable motor assembly with 11028PTA
 - 21.6V 2.5Ah Li-ion rechargeable battery
 - 1.5m hose assembly & on/off nozzle
 - Your time creator & energy saver
 - Manufactured in Taiwan
- *Figures as above based on 5W-30 engine oil

Also Available **11028PTA**
Alemlube 20L Oil Drum Pump Pumptube Assembly

COMING SOON

11068
Alemlube 60L Battery Operated Oil Drum Pump



NEW

2 YEAR WARRANTY

AR1220CAR Rewinda Compressed Air Hose Reel - 20m x 12mm ID

- Suitable for use in mine sites, automotive, transport, manufacturing, agricultural & civil contractor workshops this compressed air hose reel is ideal for use with tyre gauges, pneumatic drills, impact wrenches, angle grinders & ratchets
- High grade impact resistant UV stabilised covers
- Updated mounting brackets fits other leading brands
- Detachable steel mounting bracket enables 180° hose reel rotation
- 20m x 12mm ID hose & 0.9m lead in hose
- 1/2" BSPT(m) inlet/outlet connections
- Maximum working pressure of 300 psi (20 bar)
- Working temperature of -40°C to +80°C
- Weight of 14kg
- Dimensions of 580mm (L) x 480mm (H) x 270mm (W)




NEW

Also Available **AR1220CAB** as above but blue high grade impact resistant UV stabilised cover

KP118P Ravaglioli 13.5t Pneumatic Jacking Beam to suit pits

- 13,500kg capacity
- Suitable for pits 840mm-1100mm wide
- 2 lifting pistons
- Air hydraulic pump
- Manufactured in Italy

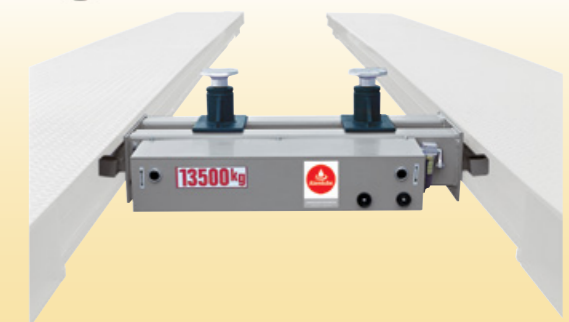


2 YEAR WARRANTY

AA296
Alemlube Automotive
Commercial Vehicle Tyre Changer



- Clockwise/Anticlockwise rotation of clamps ranging from 14" to 42"
- Maximum tyre width of 1,050mm
- Maximum tyre diameter of 2,300mm
- Automatic electro-hydraulic operation
- Hydraulic motor with pressure adjustment device
- Movable control unit

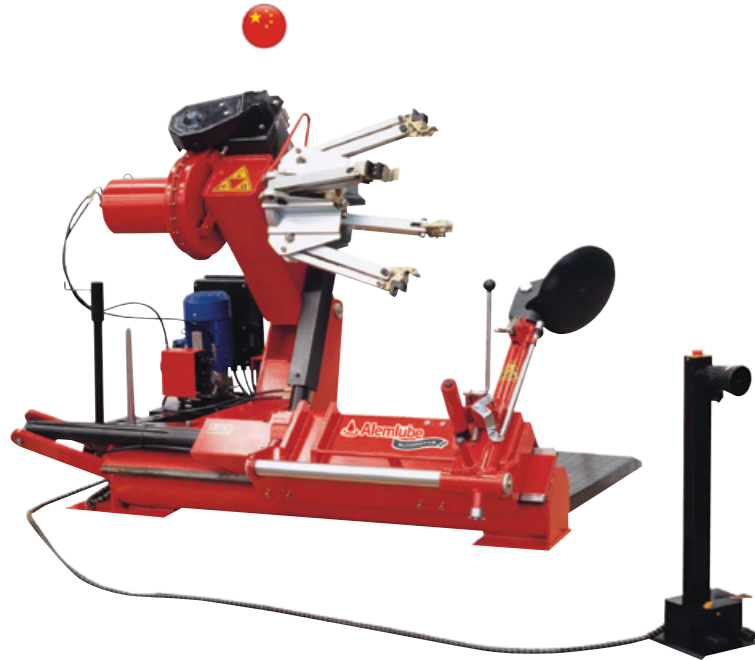

AA850
Alemlube Automotive
Commercial Vehicle Wheel Balancer




- Suitable for balancing commercial vehicle, bus & light commercial vehicle wheels
- Handles rim sizes from 10" to 24"
- Handles rim widths from 1.5" to 20"
- Balancing accuracy of $\pm 50g$
- Manually operated distance & wheel diameter input
- Pneumatic tyre lifting platform
- LED numeric display screen



AA290-240V
Alemlube Automotive
Commercial Vehicle Tyre Changer



- Automatic electro-hydraulic operation
- Clockwise & anti-clockwise clamp rotation
- Simultaneous movement of lifting arm & tool carrier
- Handles rim sizes from 14" to 26"
- 1.5kW pump motor & 2.2kW rotating motor
- Maximum tyre diameter of 1,200mm
- Maximum tyre width of 700mm
- Maximum tyre weight of 500kg
- Available in 240V or 415V

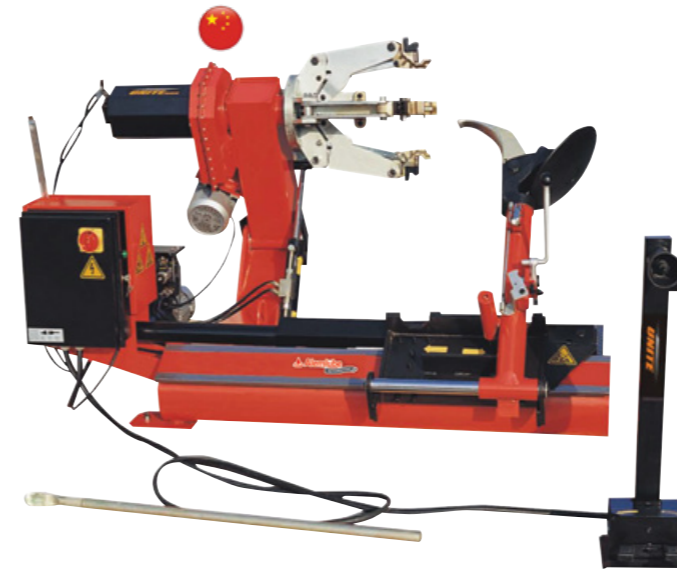

AAPTWPB2
Alemlube Automotive Premium
Commercial Vehicle Wheel Balancer



- Innovative space-saver hand spin balancing system for truck & bus wheels, to be mounted on truck tyre changer, particularly suitable also for mobile service.
- Supplied with storage stand complete with housings for machine, display & cones
- Manufactured in Italy



G96N
Ravaglioli
Commercial Vehicle Tyre Changer



- Tyre-changer for commercial vehicle wheels from 11" to 27"
- In order to avoid any damage to the rim, the hydraulic pressure of the rim clamping chuck is adjustable
- The operating dimensions of the rim clamping unit & of the head tool carriage allow the tyre changer to operate on a whole range of wheels, including super-single
- Manufactured in Italy



G9156.11
Ravaglioli
Commercial Vehicle Tyre Changer



- Electro-hydraulic tyre changer for commercial vehicles, agricultural & earth moving vehicles
- The dimensions & work strokes are such as to ensure maximum efficiency for the entire range of tyres
- The two-speed rotation chucking table can accommodate rims up to 42" without extensions
- Manufactured in Italy



GRS926
Ravaglioli
Commercial Vehicle Tyre Changer



- Commercial Vehicle Tyre Changer for both roadside & workshop service, suitable for closed vans and/or small workshops.
- Hydraulic chucking table
- Hydraulic up-down movement
- Handles rim size from 11" to 27"
- Manufactured in Italy



GTL4.140RC
Ravaglioli
Commercial Vehicle Wheel Balancer



- Versatile machine, designed for easy, fast & accurate balancing of commercial wheels
- Microprocessor controlled with self-calibration & self-diagnostics
- Specific balancing programs for static, dynamic & ALU wheels (light alloy)
- Complete with cones for commercial vehicles (\emptyset from 202 - 221mm & 281mm)
- Manufactured in Italy



SAMOA NEX.U.® OIL MANAGEMENT SYSTEM

The Samoa NEX.U.® Oil Management System provides you with the control & the information you require to make your operation more profitable. You will be able to account for every drop of lubricant & other service fluids used. Moreover, NEX.U.® gives you the opportunity to utilise an efficient inventory control system with automatic alerts & fluid recording when needed, eliminating operations downtime. NEX.U.® is suitable for almost any lubricant usage or size of operation & quickly pays for itself. Once paid for, savings go right to your bottom line in the form of profit, profit previously lost. NEX.U.® is a hybrid system with all the advantages of wireless flexibility & hard-wired reliability.



383300 U-NET NEX.U.® System Central Processing Unit

- U-Net is the key NEX.U.® component. It is the central processing unit that controls the system communications & houses the U-Track software



383000 U-DAT Access Keypad

- U-Dat allows system access to technicians either through a PIN code or using a RFID card



383100 U-TANK Tank Level Monitor Module

- The U-Tank level monitor module can be used to control two tanks



383700 U-VIEW Remote Display Module

- Remote, high visibility, LED display that shows the volume delivered through various U-Valves (no simultaneous operation supported)




383400 U-VISION + Hand-held Display & Keypad Module

- U-Vision+ includes a six-button keypad & it can replace the U-Dat keypad for data entry in the system



383501 U-VALVE Intelligent Flow Control Unit (Vol. Meter)

- NEX.U.® obtains dispensed volume information from oval gear meters

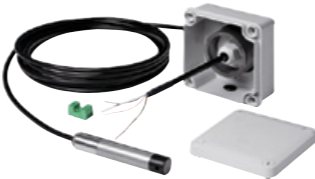

382120 Tank Level Pressure Gauge

- Allows real-time monitoring of the volume in a tank



383210 U-CONNECT WIFI Module

- Allows wireless communication among the different components of the system.
- Equipped with an external antenna
- Allows for extended signal coverage

Wireless Flexibility

- Data can be transmitted wirelessly among the different system components, eliminating long & expensive cable runs
- Easily adds new components when required as your needs grow
- System uses existing Wi-Fi® networks, simplifying its installation. No need for special, custom made, network components

Hard-Wired Reliability

- Hard-wired data transmission to avoid interferences & other obstacles which might interfere with wireless data transmission
- A constant & reliable power source is always present to power the solenoid valves that control fluid delivery

ALEMLUBE AUTOMOTIVE GANTRIES

AA205-3DG Alemlube Automotive 205L 3 Drum Lubrication Gantry

- Alemlube 20m x 1/2" ID spring rewind oil hose reels
- Heavy duty 5:1 oil drum pump
- Tie down points for 205 drums
- Designed & welded to AS1554.1
- 2" BSP drain port for bund included

General Range Equipment:

- 348120 5:1 ratio drum pump
- HR90090 20m x 1/2" ID oil hose reel
- O30020 Drip tray
- 365534 Digital metered control valve
- 3-Bund gantry Primary assembly

Also Available
AA205-2DG
As above but 2 Drum



O30070 EL Series Mobile Oil Transfer Kit With Hose Reel

- Transfer kit flow rates of up to 8L/min
- Suitable for use with engine, gear, hydraulic oils up to SAE130 & ATF
- Air pressure range from 20psi to 140psi
- Low air consumption of 180NL/min (6.4cfm)
- Complete with 15m x 1/2" ID S.A.E. 1001R1 wire braid hose
- High mobility kit complete with 3:1 ratio oil pump, oil hose reel with 15m x 1/2" ID hydraulic hose, electronic oil meter, 2" bung adaptor to suit 205L drum & robust heavy duty trolley
- Ideal for small to medium size workshops moving low to medium volumes of oil daily
- Your cost effective oil delivery & metring solution

Also Available
O30060
EL Series 205L
Mobile Oil Transfer Kit



ALEMLUBE AUTOMOTIVE PREMIUM WORKSHOP CLIMATE CONTROL

FEATURES & BENEFITS:

- Cools without chemicals or refrigerants
- Creates a cooler more productive workplace
- Suitable for warehouses & workshops where traditional cooling methods are impractical or cost prohibitive
- Environmentally friendly & almost maintenance free
- Polyethylene housing will not crack & is rust and leak proof
- LCD Panel & remote control with 24-hour timer
- Easy to read water level sight tube gauge
- Large castors with brake
- Easy to refill water inlet or use 3/4 hose fitting

AAPKA24 Alemlube Automotive Premium Mobile Evaporative Air Cooler

- 240V/50HZ 650W 3 speed motor
- Fan diameter - 24"/60cm
- Maximum cooling area - 150sqm
- Tank capacity - 70L
- Maximum water consumption - 10L/hour
- Dimensions - 92.5cm x 58cm x 144cm

AAPKA30 Alemlube Automotive Premium Mobile Evaporative Air Cooler

- 240V/50HZ 1100W 3 speed motor
- Fan diameter - 30"/76cm
- Maximum cooling area - 220sqm
- Tank capacity - 130L
- Maximum water consumption - 20L/H
- Dimensions - 112cm x 64cm x 160cm



FEATURES INCLUDE:

- 1.5kw motor power, Weight of 110kg
- Up to 1,800sqm application area
- Maximum noise output of 43dBA
- HVLS: High volume low speed - distributes high volume air at a slow speed over large areas
- 6 blades for increased airflow 12,000m³/min (AAP-SF-4E model has 5 blades)
- Displace fumes & workshop odours to maintain a comfortable and healthy work area using a low operating cost & safe cooling device
- Manufactured to stringent European CE Standards
- Compliant with Australian Standards
- Installed in spaces higher than 4m ceiling height

Product Number	Blade Diameter	RPM	Voltage	Application Area
AAP-SF-4E	4m	40 to 102	240V	450sqm
AAP-CF-5E	5.5m	20 to 63	415V	1,050sqm
AAP-CF-6E	6.1m	20 to 58	415V	1,380sqm
AAP-CF-7E	7.3m	20 to 53	415V	1,800sqm

*Must be installed by a qualified commercial electrician

ALEMLUBE AUTOMOTIVE PREMIUM MOBILE WIRELESS COLUMN LIFTS

AAPMC85T

Alemlube Automotive Premium Heavy Duty 8.5t Mobile Wireless Column Lifts

- Lifting capacity 8.5 tonne per column
- Wireless Connection
- Maximum lifting height 1,700mm
- Each column can be a master or a slave
- Up to 16 columns in a system
- Cable free design, with built-in double batteries
- Easy to move adjustable forks - maximum 550mm, minimum 166mm
- Control panel with LCD colour touch screen
- Built-in hydraulic wheel kit for easy moving
- Built-in forklift lifting point for easy transportation
- Can be operated in single mode, double mode, & all mode
- Lifting time - 90 seconds, lowering time - 80 seconds
- Charging power supply - 240V
- Weight 800kg per column

Also Available

AAPMC85T-808000A

Set of 4 Jack Stands in 8,500kg capacity per stand (1,372mm to 1,972mm)

AAPMC85T-750000

Crossbeam adapter to be used with 2 columns - maximum capacity: 11,000kg

AAPMC85T-10000

Kingpin adapter, use with Crossbeam adapter for lifting Truck Trailers

AAPMC85T-800000T

Forklift adapters sold as a pair to be used with 2 columns - maximum capacity: 11,000kg

AAPMC85T-760000

Tractor Adapter

18 MONTH WARRANTY



ALEMLUBE INHOUSE DESIGN, LIGHT ENGINEERING & FABRICATION FACILITIES




Alemlube's first class fabrication facilities are managed by highly qualified industry professionals with the right expertise and industrial design experience. Specialities include workshop benches to any specification of height and width and special consideration in accommodating unique equipment or workshop accessories.

Bespoke requirements can be designed and included in the manufacturing, be it powder coated or stainless steel and inclusive of any corporate colour identity. Additionally, storage tanks for grease, oil and waste oil are consistently being manufactured to any specification and are completely compliant with all WHS regulations.

Alemlube's in-house Fabrication capabilities allow us to provide oil tanks, gantries, workbenches and custom metal fabrication, for example the Container Lube Shed Project shown above, tailored to fit your specific requirements.

Our aim is to exceed your expectations with our unique design, engineering, fabrication capability including laser cutting, welding, spray painting and our personal attention with ongoing advice and support.

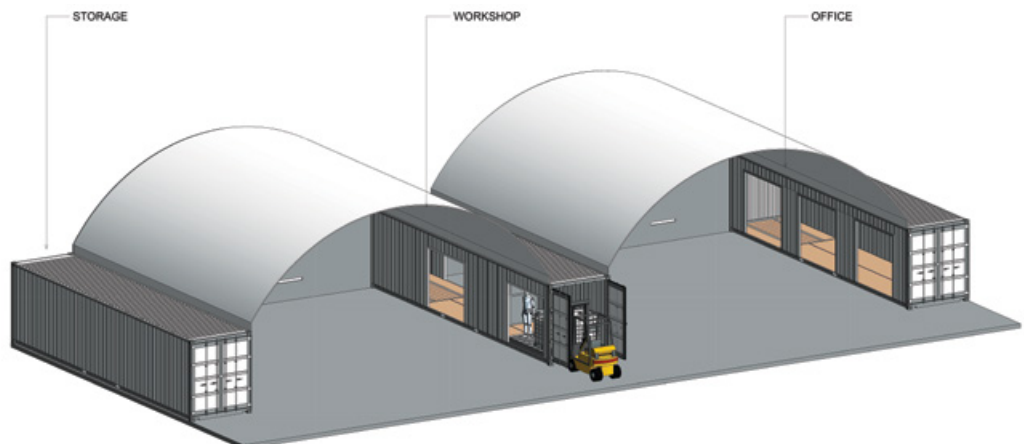

NSW/ACT (02) 9677 1555 | QLD/PNG (07) 3491 2600 | VIC/TAS (03) 8787 8288 | WA (08) 9302 4199 | SA/NT (08) 8241 7111

All prices exclude GST and vehicle hoist installation costs. Delivery and freight charges apply. Repayments paid monthly over 60 months, excluding GST. To approved applicants subject to normal credit criteria. Alemlube will do everything possible, within reason to maintain stocks of products advertised but cannot be responsible for unforeseen shortfalls beyond their control.

info@alemlube.com.au | www.alemlube.com.au

E&OE Prices & Specifications subject to change without prior notice © 2025 Alemlube Pty Ltd CVE&FS 0525

