GARRICK
LIFTING EQUIPMENT

Chain Blocks & Lever Hoists



GARRICK LIFTING EQUIPMENT

Mini Chain Block

A compact & lightweight chain block for confined spaces or where the lighter weight is a consideration for carrying the unit to the job (e.g. rigging or mines)

- **Compact - minimum headroom (hook to hook = 230mm)**

MODEL	Size	Lift	Weight
GCB0022	0.25T	2 m	3.5kg



GARRICK LIFTING EQUIPMENT

Mini Lever Hoists

Compact & lightweight Lever Hoists for confined spaces or where the lighter weight is a consideration for carrying the unit to the job (e.g. rigging or mines)

- **Compact - minimum headroom (hook to hook)**
- **Lightweight robust construction - from only 2 kg**

MODEL	Capacity	Lift	Headroom	Weight
GLH025	0.25T	1.5 m	215 mm	2 kg
GLH050	0.5T	1.5 m	255 mm	3.5 kg



GARRICK LIFTING EQUIPMENT

Chain Blocks - Load Limited

With the added safety of overload protection

Models from 0.5 T to 10 T ex. stock (larger sizes available ex. factory)

- **Overload Protection facility is factory set to prevent abuse, damage or unsafe practice**
- **Durable stainless steel labels**

MODEL	Size	Lift
GCBLL0053	0.5T	3m
GCBLL0056	0.5T	6m
GCBLL0103	1T	3m
GCBLL0106	1T	6m
GCBLL0203	2T	3m
GCBLL0206	2T	6m

MODEL	Size	Lift
GCBLL0303	3T	3m
GCBLL0306	3T	6m
GCBLL0503	5T	3m
GCBLL0506	5T	6m
GCBLL1006	10T	6m



GARRICK LIFTING EQUIPMENT

Lever Hoists - Load Limited

With the added safety of overload protection

Models from 0.75 T to 6 T ex. stock (larger sizes available ex. factory)

- **Durable stainless steel labels**

MODEL	Size	Lift
GLHLL075	0.75T	1.5 m
GLHLL150	1.5T	1.5 m
GLHLL300	3T	1.5 m
GLHLL600	6T	1.5 m



TOHO By GARRICK

Industrial Chain Blocks

Models from 0.5T to 10T ex stock (larger sizes available ex factory)

- **Standard blocks without overload protection manufactured to exacting industrial standards**

MODEL	Size	Lift
TCB0053	0.5T	3m
TCB0056	0.5T	6m
TCB0103	1T	3m
TCB0106	1T	6m
TCB0203	2T	3m
TCB0206	2T	6m

MODEL	Size	Lift
TCB0303	3T	3m
TCB0306	3T	6m
TCB0503	5T	3m
TCB0506	5T	6m



TOHO By GARRICK

Industrial Lever Hoists

Models from 0.75T to 9T ex stock

- **Standard hoists without overload protection manufactured to exacting industrial standards**

MODEL	Size	Lift
TLH075	0.75T	1.5m
TLH150	1.5T	1.5m
TLH300	3T	1.5m
TLH600	6T	1.5m
TLH900	9T	1.5m

GARRICK
LIFTING EQUIPMENT

Girder Trolleys & Clamps

Girder Trolleys

Models from 0.5T to 10T

- Robust all steel construction
- Adjustable to various beam widths
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Trolley
- Comply with AS/NZS 4991
- Meet or exceed other International Standards such as GS, CE & ANSI



Push type

Model	Size	Style	Beam
GPT005	0.5T	Push	64-152mm
GPT010	1T	Push	64-210mm
GPT020	2T	Push	88-210mm
GPT030	3T	Push	102-210mm
GPT050	5T	Push	114-210mm



Geared type

Model	Size	Style	Beam
GGT010	1T	Geared	64-210mm
GGT020	2T	Geared	88-210mm
GGT030	3T	Geared	102-210mm
GGT050	5T	Geared	114-210mm
GGT100	10T	Geared	125-210mm

Girder Clamps

Models from 1 T to 10 T

- Robust all steel construction
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Clamp
- Comply with AS/NZS 1418.2
- Meet or exceed other International Standards such as GS, CE & ANSI



Model	Size	Beam
GGC010	1T	75-230mm
GGC020	2T	75-230mm
GGC030	3T	80-320mm
GGC050	5T	90-320mm
GGC100	10T	90-320mm

Universal Plate Clamps

Models from 0.8 T to 5 T

- Robust all steel construction
- Durable stainless steel labels
- Test Certificate and Instruction Manual supplied with every Clamp
- Comply with AS/NZS 1418.2
- Meet or exceed other International Standards such as GS, CE & ANSI
- Articulated knuckle on eye permits plate to be laid flat



Model	Size	Opening
GVC008	0.8T	0 - 15mm
GVC016	1.6T	0 - 20mm
GVC020	2.0T	0 - 25mm
GVC032	3.2T	0 - 30mm
GVC050	5.0T	0 - 50mm

GARRICK
LIFTING EQUIPMENT

Drum Lifters

Vertical Drum Clamp

Model GDCV

The Garrick Drum Clamp has been designed to lift and transport steel & plastic drums in the vertical position. One clamp can be used to lift drums with or without their lids by gripping the rim of the drum.



- **Its lightweight and small overall design makes it ideal for picking up drums that sit tightly on pallets.**
- **The centre of gravity of the drum is below the lifting point during transportation.**
- **Comply with AS/NZS 1418.2**

Chain & Clamp Drum Lifter

Model GDLC

For easy lifting of 20, 60 & 205 L drums.

- **Lifting Capacity 1000kg**
- **Alloy steel chain**
- **High grade hooks**
- **Built to industrial standards**
- **Comply with AS/NZS 1418.2**
- **Can be used to lift drums with and without lids**



Scan for Video

YouTube

TOHO By GARRICK

Electric Mini Hoist

TOHO Pro Mini Electric Hoist 500kg capacity - 240V

Model: TPMEH500

- Running time is 3 times longer than a normal mini hoist
- Lifting Speed 10m per min when using single line or 5m per min when using double line
- Up/down controls with emergency stop button
- Lifting height 12m on single rope or 6m using double rope
- Automatic brake/cut off
- Anti-heat device on motor
- Single rope capacity 250kg
- Double rope capacity 500kg
- 900w motor
- Control Pendant Length is 1.5mtr



- Complies with ASNZS 1418.2 standard

IP Rating	
Hoist:	IP45
Control:	IP45

500Kg 3mtr Electric Chain Hoist


MODEL: TECH0053 - 500Kg 3mtr Electric Chain Hoist

Need a simple lift to do all the heavy lifting for you? Toho Electric Chain Hoist is the perfect solution! Toho Hook Suspension Electric Chain Hoist is portable and can be hooked onto any safe mounting point to lift heavy objects such as pallets, engines and many more items (which are safely strapped).

The Toho Hook Suspension Electric Chain Hoist is perfect for warehouses, garages and mechanics.

Features:

- Load limited gear
- Light weight, compact design with high efficiency motor
- Pressed steel structure, high strength body
- High tensile alloy steel top & bottom hooks
- Compact chain container
- Grade 80 – 6.3mm alloy steel load chain
- 1300W single speed motor
- IP grade IP65

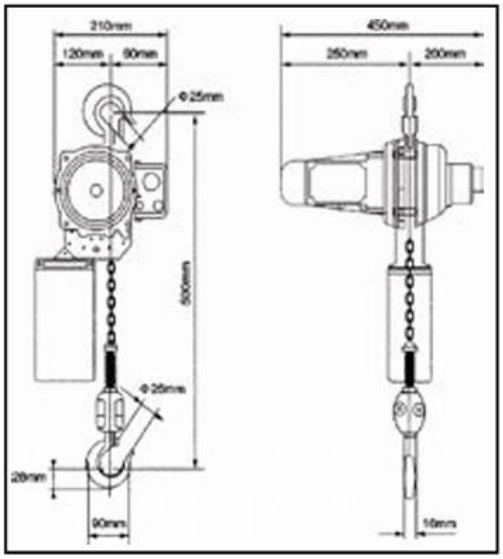



Specifications:

- Power: 240V
- Frequency: 50Hz
- Motor power: 1300W
- Weight capacity (Tonne): 0.5 tonne / 500kg
- Standard lift: 3m
- Lifting speed: 5m/min
- Diameter of chain: 6.3mm
- Dimensions (L x W x H): 450mm x 210mm x 480mm
- Weight: 19kg

*** Hoists can be re-chained to your required length (limits apply)**

1-phase, 240v, 50Hz (single speed)									
Model	Capacity tonne	Standard Lift M	Running Test Load kN	Motor Power (kW)	No. of Chain	Dia of Chain mm	Lifting Speed (m/min)	Net Weight kg	Extra weight per metre of extra lift kg
TECH0053	0.5	3	6.25	1.3	1	6.3	5	19	.81